



FPA


HOT WATER HEATING PANEL - VARIOUS DECORS



(decor WAVE)


FEATURES:

- Steel construction
- Heater with a plate exchanger  **HIGHER OUTPUT**  - type 1010, 1020
- Front panels made of white or decored laminate or made-to-order
- Glossy gray side boards
- Two possibilities of mantling – on the floor/ on the wall
- Can be made accommodated to a customer's request

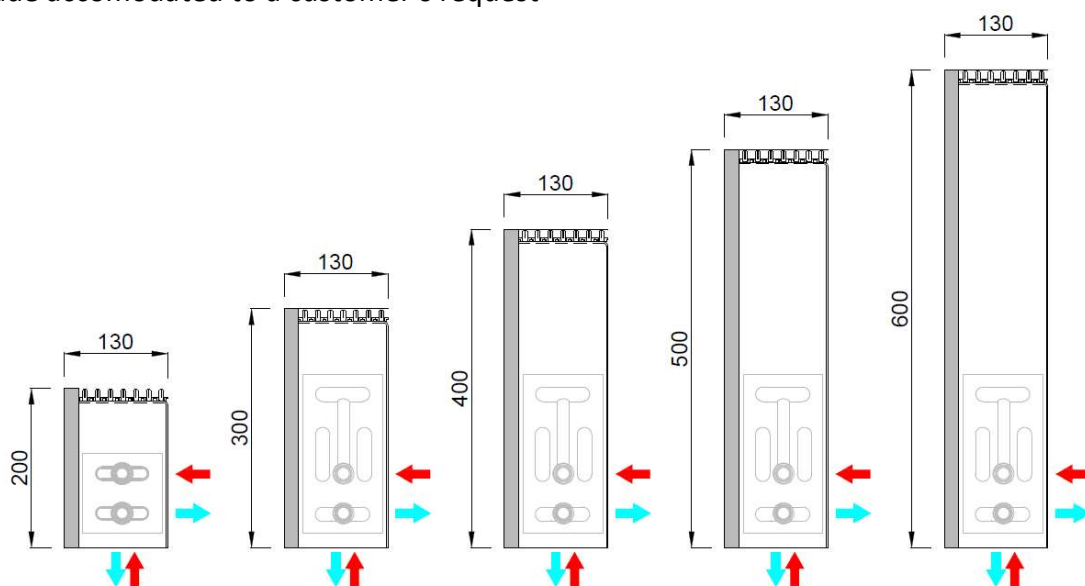

DECORS

White laminate is basic and most frequently used decor. Other main decors possible:

1	0112-pe-grey		5	34140-rv-bruno oak		9	h1334-sorano oak light		13	0851-pe-metallic	
2	0164-pe-anthracite		6	37307-pr-nature oak		10	h3734-dijon walnut		14	0859-pe-platinum	
3	w980-sm-platinum-white		7	37755-bs-european walnut		11	h1733-mainau birch		15	0881-pe-aluminium	
4	2109-bs-ivory		8	h1145-bardolino oak		12	0381-pr-beech		16	0794-fh-patina-bronze	

FOX PANEL HEATING OUTPUT


PRODUCT CODE						Natural convection																					
		exch.	-	H	-	L	-	D	L (mm)	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500
200 mm	FPA	1010	-	200	-	L - 130			75/65/20°C	363	428	493	558	622	687	752	817	882	946	1011	1076	1141	1206	1271	1335	1400	1465
									55/45/20°C	171	202	232	263	293	324	354	385	416	446	477	507	538	568	599	630	660	691
He 300 mm	FPA	1010	-	300	-	L - 130			75/65/20°C	387	457	526	595	664	733	802	872	941	1010	1079	1148	1217	1287	1356	1425	1494	1563
										705	831	957	1083	1209	1334	1460	1586	1712	1838	1964	2090	2216	2342	2468	2593	2719	2845
									55/45/20°C	184	216	249	282	315	348	380	413	446	479	511	544	577	610	643	675	708	741
										334	394	453	513	573	632	692	752	812	871	931	991	1050	1110	1170	1229	1289	1349
He 400 mm	FPA	1010	-	400	-	L - 130			75/65/20°C	401	473	544	616	687	759	830	902	974	1045	1117	1188	1260	1332	1403	1475	1546	1618
										730	860	990	1121	1251	1381	1511	1642	1772	1902	2033	2163	2293	2424	2554	2684	2814	2945
									55/45/20°C	191	225	259	293	327	362	396	430	464	498	532	566	600	635	669	703	737	771
										348	410	472	534	596	658	720	782	844	906	969	1031	1093	1155	1217	1279	1341	1403
He 500 mm	FPA	1010	-	500	-	L - 130			75/65/20°C	408	481	554	627	699	772	845	918	991	1064	1136	1209	1282	1355	1428	1501	1574	1646
										743	875	1008	1140	1273	1405	1538	1671	1803	1936	2068	2201	2334	2466	2599	2731	2864	2997
									55/45/20°C	195	230	265	300	335	370	405	440	475	510	544	579	614	649	684	719	754	789
										356	419	483	546	610	673	737	800	864	927	991	1054	1118	1181	1245	1309	1372	1436
He 600 mm	FPA	1010	-	600	-	L - 130			75/65/20°C	411	484	557	631	704	777	850	924	997	1070	1144	1217	1290	1364	1437	1510	1584	1657
										747	881	1014	1148	1281	1414	1548	1681	1815	1948	2082	2215	2348	2482	2615	2749	2882	3016
									55/45/20°C	198	233	268	304	339	374	410	445	480	516	551	586	622	657	692	727	763	798
										360	424	488	553	617	681	746	810	874	938	1003	1067	1131	1195	1260	1324	1388	1453

		exch	-	H	-	L	-	D	L (mm)	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500
200 mm	FPA-Q	1010	-	200	-	L	-	130	75/65/20°C	751	885	1019	1153	1287	1421	1555	1689	1823	1958	2092	2226	2360	2494	2628	2762	2896	3030
									55/45/20°C	426	502	578	654	731	807	883	959	1035	1111	1187	1263	1339	1415	1492	1568	1644	1720
He 300 mm	FPA-Q	1010	-	300	-	L	-	130	75/65/20°C	781	921	1060	1200	1339	1478	1618	1757	1897	2036	2176	2315	2455	2594	2734	2873	3013	3152
		1020								1422	1675	1929	2183	2437	2691	2945	3199	3452	3706	3960	4214	4468	4722	4975	5229	5483	5737
		1010							55/45/20°C	443	522	601	680	759	838	917	996	1075	1154	1233	1312	1391	1470	1550	1629	1708	1787
		1020								806	950	1094	1237	1381	1525	1669	1813	1957	2101	2245	2389	2532	2676	2820	2964	3108	3252
He 400 mm	FPA-Q	1010	-	400	-	L	-	130	75/65/20°C	806	950	1094	1237	1381	1525	1669	1813	1957	2101	2245	2388	2532	2676	2820	2964	3108	3252
		1020								1466	1728	1990	2252	2514	2776	3038	3300	3561	3823	4085	4347	4609	4871	5133	5394	5656	5918
		1010							55/45/20°C	456	538	619	700	782	863	945	1026	1108	1189	1270	1352	1433	1515	1596	1678	1759	1841
		1020								830	978	1127	1275	1423	1571	1719	1868	2016	2164	2312	2461	2609	2757	2905	3053	3202	3350
He 500 mm	FPA-Q	1010	-	500	-	L	-	130	75/65/20°C	827	975	1123	1271	1418	1566	1714	1862	2009	2157	2305	2453	2600	2748	2896	3044	3191	3339
		1020								1506	1775	2044	2312	2581	2850	3119	3388	3657	3926	4195	4464	4733	5001	5270	5539	5808	6077
		1010							55/45/20°C	468	551	635	718	802	885	969	1052	1136	1219	1303	1386	1470	1553	1637	1720	1804	1887
		1020								851	1003	1155	1307	1459	1611	1763	1915	2067	2219	2371	2523	2675	2827	2979	3131	3283	3435
He 600 mm	FPA-Q	1010	-	600	-	L	-	130	75/65/20°C	847	998	1150	1301	1452	1603	1755	1906	2057	2209	2360	2511	2662	2814	2965	3116	3267	3419
		1020								1542	1817	2092	2368	2643	2918	3194	3469	3744	4020	4295	4570	4845	5121	5396	5671	5947	6222
		1010							55/45/20°C	478	564	649	734	820	905	990	1076	1161	1247	1332	1417	1503	1588	1674	1759	1844	1930
		1020								870	1026	1181	1336	1492	1647	1803	1958	2113	2269	2424	2580	2735	2891	3046	3201	3357	3512

TECHNICAL SPECIFICATION FOR ORDER:

Example: FPA-1010-200-1900-130

FOX PANEL-1010(exchanger type)-200mm(H-height)-1900mm(L-length)-130mm(D-depth)

SIDE CONNECTION**BOTTOM CONNECTION****SIDE CONNECTION****BOTTOM CONNECTION**