

## SUSPENDED FLOOR CONVECTORS

## MADE-TO-MEASURE

## HOT WATER HEATER WITH FAN





# FSI-Q



## FEATURES:

- Floor convector is always made to measure to fit a pre-prepared hole in a finished floor.
- Supporting aluminium frame is suspended on perimeter boards.
- Heater – FOXIS wired exchanger type 118, 218.
- Inner plastic basin is open – there is no impact noise arising.
- The convector can be easily dismantled from the floor.
- Fan system consists of automatically working 12V fans with manual speed setting. It is necessary to make a 230V socket in the heating step space (the socket is not provided – it must be a part of already existing electrical installation).

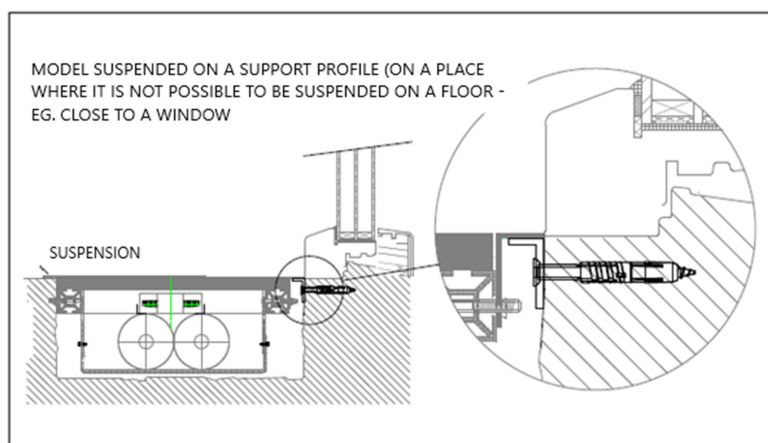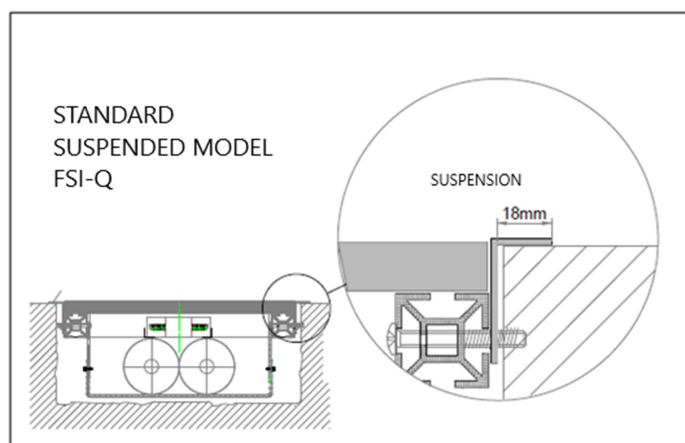

## ORDER CODE SPECIFICATION:

Example:

FSI-Q-118-90-2430-200



FOX SILENT-Q-118 (exchanger type)-90 (H-height)-2430 (L-length)-300 (D-depth)

FOX SILENT Q heating outputs (W)

FSI-Q-118-120-L-200	L	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500	2600	2700	2800
	ΔT 50°C	546	651	756	861	966	1071	1176	1281	1386	1491	1596	1701	1806	1911	2016	2121	2226	2331	2436	2541	2647
	ΔT 30°C	307	366	425	484	542	601	660	719	778	837	896	955	1014	1073	1132	1191	1250	1309	1368	1427	1486
	L	2900	3000	3100	3200	3300	3400	3500	3600	3700	3800	3900	4000	4100	4200	4300	4400	4500	4600	4700	4800	4900
	ΔT 50°C	2752	2857	2962	3067	3172	3277	3382	3487	3592	3697	3802	3907	4012	4117	4222	4327	4432	4537	4642	4747	4852
	ΔT 30°C	1545	1604	1663	1722	1781	1840	1899	1958	2017	2076	2134	2193	2252	2311	2370	2429	2488	2547	2606	2665	2724
FSI-Q-218-120-L-300	L	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500	2600	2700	2800
	ΔT 50°C	969	1156	1342	1529	1715	1902	2088	2275	2461	2647	2834	3020	3207	3393	3580	3766	3953	4139	4325	4512	4698
	ΔT 30°C	544	649	754	858	963	1068	1172	1277	1382	1486	1591	1696	1800	1905	2010	2114	2219	2324	2428	2533	2638
	L	2900	3000	3100	3200	3300	3400	3500	3600	3700	3800	3900	4000	4100	4200	4300	4400	4500	4600	4700	4800	4900
	ΔT 50°C	4885	5071	5258	5444	5630	5817	6003	6190	6376	6563	6749	6936	7122	7308	7495	7681	7868	8054	8241	8427	8614
	ΔT 30°C	2743	2847	2952	3057	3161	3266	3371	3475	3580	3685	3789	3894	3999	4103	4208	4313	4417	4522	4627	4731	4836

FSI-Q-118-H-L-200

POSSIBLE CONNECTION OF THE  
CONNECTOR TO THE PIPING

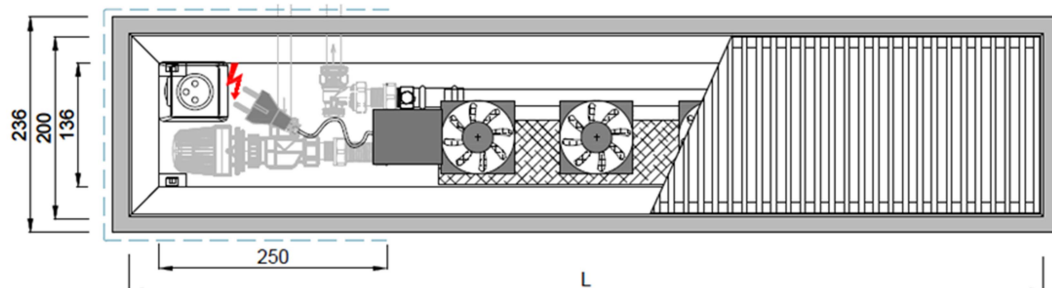

FSI-Q-218-H-L-300

